


Function

- Receive signal and local VHF/UHF signals
- The product can be mounted on a TV, wall or table
- Stylish slim profile
- Low noise amplifier
- Includes a removable amplifier that meets the requirements of various receivers
- Built-in 5G filter prevents interference from mobile signals
- Complies with the latest European Union Directive (2014/53/EU).


Specifications

- Frequency: VHF 174~230MHz, UHF 470~698MHz
- Impedance (Ω): 75
- Connector: IEC type (male)
- Voltage: AC 100-240 V DC 5 V/ 550 mA
- Cable length: 1.5 m + 0.86 m


Package contents



Installation

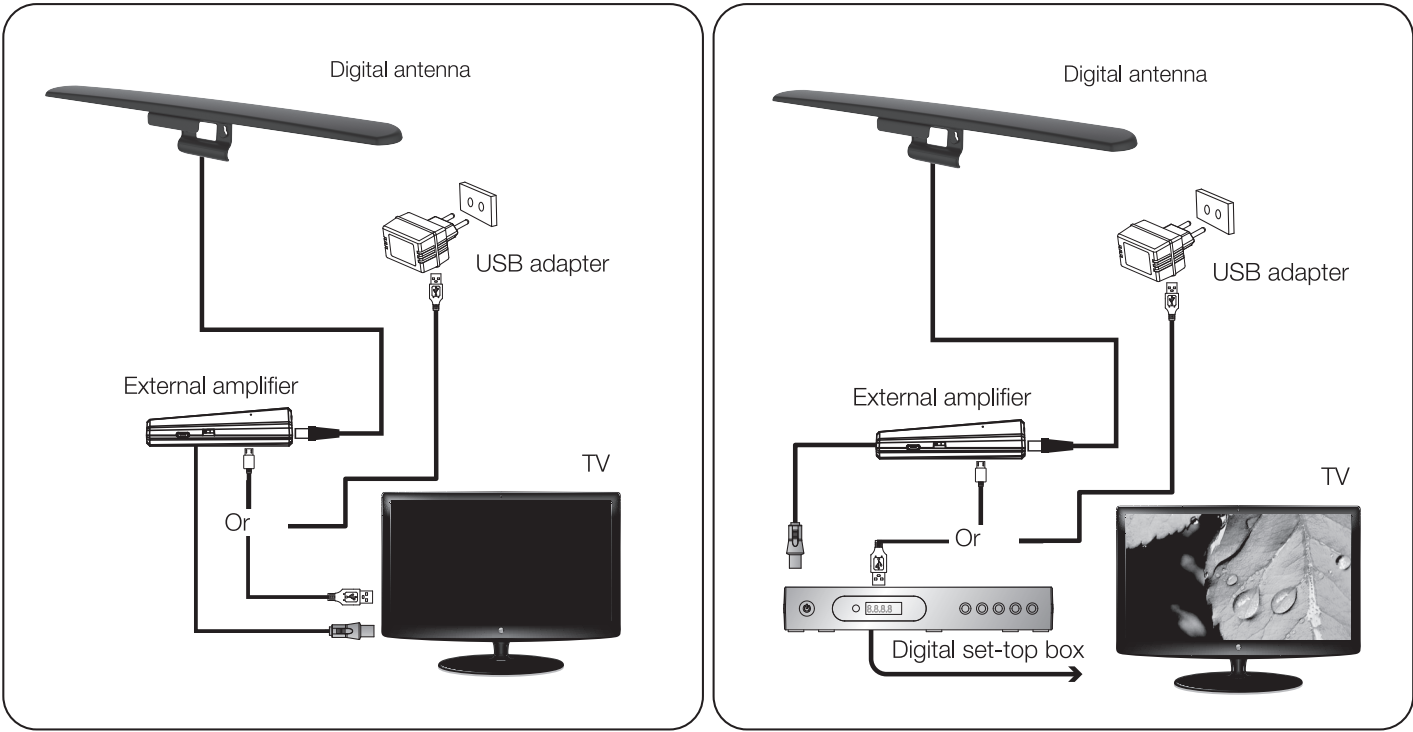

Placement

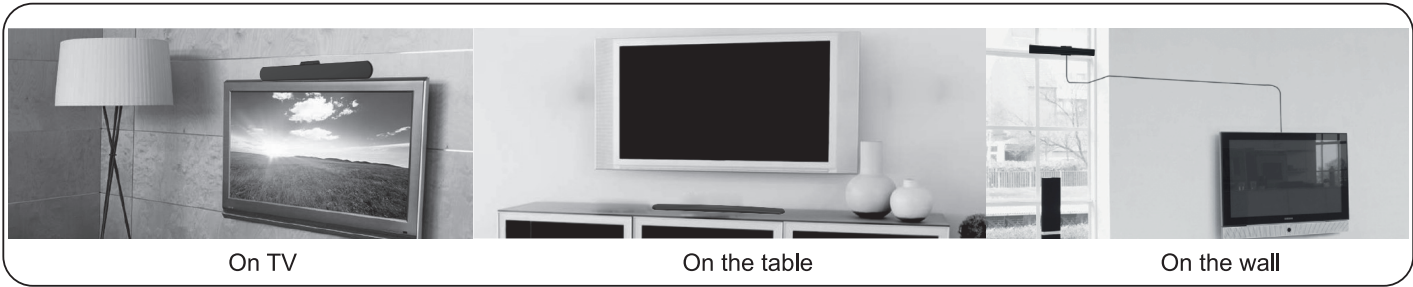

Notification

1. The antenna can be used with or without an amplifier, depending on which type of connection provides the best signal.
In most cases, performance is best when using an amplifier, so try using that first.
If you find that you have lost the signal of stations you normally receive, try connecting without an amplifier.
2. If reception is poor, try changing the antenna settings or placing it closer to windows.
3. Do not use the antenna during thunder.
4. This device is for indoor use only.



Disposal

The crossed-out wheeled bin symbol on your product, literature or packaging means that in the European Union all electrical and electronic products, batteries and accumulators must be taken to separate collection at the end of their working life. Do not dispose of these products as unsorted municipal waste.

CE DECLARATION OF CONFORMITY

Hereby, Abacus Electric, s.r.o. declares that the EVOLVEO Xany 5+ is in compliance with the essential requirements of Directive 2014/53/EC. The full text of the Declaration of Conformity can be downloaded from <http://ftp.evolveo.com/ce/>

Importer / Manufacturer - Abacus Electric, s.r.o.
Planá 2, 370 01, Czech Republic
Email: helpdesk@evolveo.com

Made in P.R.C.



Copyright © 2026 Abacus Electric, s.r.o.
All rights reserved. Appearance and specifications are subject to change without notice. Printing errors excepted.

Specifications of the included power adapter

Published Information	Value and accuracy	Unit	Notes
Manufacturer's name or trademark, commercial register number, and address	Guangdong Huasheng Electronic Technology Co., Ltd. 118 Dongyuan Road, Shipai Town, Dongguan City, Guangdong Province, China	-	-
Model identifier	HS0500550VU	-	-
Input voltage	100-240	V	Specified by the manufacturer. It must be a value or a range.
AC input frequency	50/60	Hz	Specified by the manufacturer. It must be a value or a range.
Output voltage	5	V	Rated output voltage. It indicates whether the current is alternating or direct.
			In cases where more than one physical output or more than one output voltage is measured under load condition 1, the sets of available values for Output Voltage– Output Current – Output Power shall be published.
Output current	0,55	A	Rated output current.
			In cases where more than one physical output or more than one output voltage is measured under load condition 1, the sets of available values for Output Voltage– Output Current – Output Power shall be published.
Output power	2,75	W	Rated output power.
			In cases where more than one physical output or more than one output voltage is measured under load condition 1, the sets of available values for Output Voltage– Output Current – Output Power shall be published.
Average active efficiency	≥68.96	%	Declared by the manufacturer based on a value calculated as the arithmetic mean of the efficiency at loads 1–4.
			In cases where multiple average active efficiencies are declared for multiple output voltages available under load condition 1, the published value is the average active efficiency declared for the lowest output voltage.
Efficiency at low load (10%)	/	%	Declared by the manufacturer based on a value calculated under load condition 5.
			This requirement does not apply to external power supplies with a rated output power of 10 W or less, as indicated on the nameplate.
			In cases where multiple average active efficiencies are declared for multiple output voltages available under load condition 1, the published value is the value declared for the lowest output voltage.
No-load power consumption	≤0.1	W	Declared by the manufacturer based on the value measured for load condition 6.